

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

PCT / SE 2004 / 0 0 0 3 6 3

REC'D 31 MAR 2004

WIPO

PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.




(71) Sökande UpZide Labs AB, Luleå SE
Applicant (s)

(21) Patentansökningsnummer 0300695-4
Patent application number

(86) Ingivningsdatum 2003-03-14
Date of filing

Stockholm, 2004-03-16

För Patent- och registreringsverket
For the Patent- and Registration Office


Sonia André

Avgift
Fee

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

ARRANGEMENTS AND METHODS FOR A DIGITAL COMMUNICATION SYSTEM

5

FIELD OF THE INVENTION

The present invention relates to methods and arrangements in a digital communications system, and more particularly, to automatic transmit power reduction for multilevel digital communication.

10

BACKGROUND OF THE INVENTION

A digital communication system 100 can be modelled as illustrated in **figure 1**. Data information is modulated to message symbols m_i taken from a symbol alphabet $M = \{m_0, m_1, \dots, m_{M-1}\}$. One common multilevel modulation method is Quadrature Amplitude Modulation (QAM). A digital transmitter based on QAM maps data onto a 2-dimensional ($N = 2$) coordinate system of orthogonal base vectors. **Figure 2** shows an example of 16-QAM (M has 16 elements) with one out of many possible numbering schemes. The message symbols are converted into vectors of real numbers,

$$20 \quad s_i = \begin{Bmatrix} s_{i0} \\ s_{i1} \\ \dots \\ s_{iN-1} \end{Bmatrix}$$

where the dimension is $N \leq M$, by a vector transmitter 101. A modulator 102 constructs a signal $s_i(t)$ which is sent over a channel 103. The channel affects the signal $s_i(t)$ and creates a signal $x(t)$. A detector 104 receives the signal $x(t)$, demodulates the signal and constructs an observation vector x . The observation vector is decoded by a vector receiver 105 producing an estimate \hat{m} of the symbol being sent.

Digital communication requires that there exist a method for synchronizing the receiver to the transmitter in order to decode the data correctly. The channel over which the communication takes place normally also introduces a linear transformation of the signal, which leads to the requirement of an equalization method. Synchronization and equalization methods vary between different communication systems, however, the methods are often developed under the assumption that the transmitted data is randomized in some way, usually by scrambling the data prior to modulation with a pseudo-noise sequence that is also known at the receiver. The scrambler ensures that even if the incoming data consists of long sequences of constant patterns, the data over the channel is randomized. One particular situation where long sequences of constant patterns normally occurs in the data stream is when there is no user data, i.e., the transmitter has to fill the data channel with dummy data. The scrambling ensures that the power level on the channel is approximately constant regardless of the data content user data or dummy data. The average energy per modulation interval is

$$E_{av} = \frac{1}{\|M\|} \sum_{i=0}^{\|M\|-1} E_i = \quad (1)$$

where E_i is the energy level for a particular constellation point and $\|M\|$ is the size of the symbol alphabet which is equal to the number of constellation points.

In contrast, in several applications, such as Very high data rate Digital Subscriber Line (VDSL) system, there would be desirable to be able to transmit with a lower power when there is no user data to be sent. Depending on the type of application, this can result in reduced crosstalk, reduced radio frequency interference, and/or reduced power consumption in line driver circuitry.

Existing solutions require that the transmitter and receiver agrees upon entering a special power reduction mode when the transmitter predicts that user data will be absent for some period of time. A multi-carrier specific solution is disclosed in EP 883269 A1.

- However, it is often difficult to predict the behaviour of user data. Entering and leaving a special power reduction mode requires communication between the transmitter and receiver and is therefore time consuming. The period of time that user data will be absent must be longer than the time it takes to reach an agreement between transmitter and receiver. During the power reduction mode, the transmitter and receiver are still connected, but a transition to the power reduction mode implies that the transmitter performs the following in order to reach the agreement with the receiver:
- The transmitter requires information if no data will be transmitted in the immediate future. This information is often based on measurements and assumptions.
 - Determine the exact point of time for the transition into the power reduction mode and communicate the point of time to the receiver.
 - Receive an acknowledgement from the receiver.
- A transition from the power reduction mode implies that the transmitter performs the following:
- Determine an exact point of time for the transition from the power reduction mode and communicate the point of time to the receiver.
 - Receive an acknowledgement from the receiver.

Therefore, these solutions do not work when user data and dummy data are heavily interleaved. Entering and leaving the power reduction mode also leads to communication overhead in terms of an increased signalling.

It is also desirable that the values of the dummy data is randomized in order to avoid e.g. major peaks in the output signal.

SUMMARY OF THE INVENTION

An object of the present invention is to provide methods and arrangements for reducing transmit power when no user data is transmitted according to embodiments of the present invention.

The above stated object is achieved by means of arrangements according to claims 12, 13 and 21, by means of computer program products according to claims 10 and 11 and by means of methods according to claims 1 and 2.

5

The method according to the present invention makes it possible to reduce transmit power when no user data is transmitted. The method comprises the steps of generating symbols randomly from a predefined symbol alphabet Q that is a subset of a symbol alphabet M, scrambling a bit stream that is
10 represented by symbols from symbol alphabet M by performing bitwise modulo-2 addition between the modulated bit stream and the randomly generated symbols from Q, and transmitting said scrambled bit stream. The predefined symbol alphabet Q is defined so that the transmit power level of the dummy data is substantially lower than the transmit power level of the
15 user data.

The method according to the present invention, comprising the steps of generating symbols randomly from the symbol alphabet Q in synchronisation with the transmitter of the received bit stream and scrambling the received
20 bit stream in order to recreate estimated message symbols from symbol alphabet M by performing bitwise modulo-2 addition between the received bit stream and the randomly generated symbols from Q, makes it possible to reduce transmit power when no user data is transmitted.

25 The computer program product directly loadable into the internal memory of a computer within a receiver or transmitter in a digital communication system according to the present invention, comprising the software code portions for performing the steps of said methods, makes it possible to reduce transmit power when no user data is transmitted.

30

The computer program product stored on a computer usable medium, comprising readable program for causing a computer, within a receiver or transmitter in a digital communication system, to control an execution of

the steps of said methods according to the present invention, makes it possible to reduce transmit power when no user data is transmitted.

5 The transmitter according to the present invention makes it possible to reduce transmit power when no user data is transmitted. The transmitter comprises means for transmitting a modulated bit stream comprising user data and dummy data, wherein the modulated user data is represented by symbols from a symbol alphabet M, the modulated dummy data is represented by a symbol m_u . The transmitter further comprises means for
10 generating symbols randomly from a predefined symbol alphabet Q being a subset of M, means for scrambling the bit stream by performing bitwise modulo-2 addition between the modulated bit stream and the randomly generated symbols from Q, and means for transmitting said scrambled bit stream. The predefined symbol alphabet Q is defined so that the transmit
15 power level of the dummy data is substantially lower than the transmit power level of the user data.

The receiver according the present invention makes it possible to reduce transmit power when no user data is transmitted. The receiver comprises
20 means for receiving a bit stream wherein the bit stream is transmitted and scrambled by said transmitter. The receiver further comprises means for in synchronisation with the transmitter of the received bit stream generating symbols randomly from the symbol alphabet Q and means for scrambling the received bit stream by performing bitwise modulo-2 addition between the
25 received bit stream and the randomly generated symbol from Q in order to recreate estimated message symbols from symbol alphabet M.

The transceiver according to the present invention, comprising said transmitter and said receiver, makes it possible to reduce transmit power
30 when no user data is transmitted.

An advantage with the method of the present invention is that it is automatic and that the power reduction is instantaneous and does not result in communication overhead.

A further advantage is that the method of the present invention dictate the type of multilevel coding (QAM etc.) or the data protocol being used (ATM, VDSL, HDLC etc.). Furthermore, it works with single-carrier systems as well as with multi-carrier systems. It can also coexist with other methods such as the method disclosed in EP 883269.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic block diagram illustrating a digital communication system.

Fig. 2 illustrates an example of 16-QAM with one out of many possible numbering schemes.

Fig. 3 is a schematic block diagram illustrating a network where the present invention may be implemented.

Fig. 4a is a schematic block diagram illustrating a transmitter and a receiver using bitwise modulo-2 addition wherein $m_0=0$ in accordance with a first preferred embodiment of the present invention.

Fig. 4b is a schematic block diagram illustrating a transmitter and a receiver using bitwise modulo-2 addition wherein $m_0 \neq 0$ in accordance with a first embodiment of the present invention.

Fig. 5a is a schematic block diagram illustrating a transmitter and a receiver using transformation matrices wherein $m_0=0$ in accordance with a second preferred embodiment of the present invention.

Fig. 5b is a schematic block diagram illustrating a transmitter and a receiver using transformation matrices $m_0 \neq 0$ in accordance with a second embodiment of the present invention.

Fig. 6a shows a flowchart of a method for transmitting according to the present invention.

5 **Fig. 6b** shows a flowchart of a method for receiving according to the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

10 The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of
15 the invention to those skilled in the art. In the drawings, like numbers refer to like elements.

The method according to the present invention is preferably implemented in a transceiver 303, 304 in a digital telecommunication system as illustrated in **figure 3**. The digital telecommunication system may be a
20 Digital Subscriber Line (DSL) system such as a Very high data rate (V)DSL- or an Asymmetrical (A)DSL system. Asynchronous Transfer Mode (ATM) and an octet based High level Data Link Control (HDLC) are examples of protocols that can be used in said systems.

25 The transceiver in accordance with the present invention comprises a transmitter and a receiver. The transceivers may be located within a network terminal (NT) 303, e.g. a VDSL data modem and in an optical network unit (ONU) 304 in e.g. a VDSL network. The NT 303 and the ONU 304 are connected and communicate by using a protocol such as VDSL or
30 ADSL. The NT 303 is further connected to various terminal equipments 301, 302 such as broadband terminals or Plain Old telephone System- (POTS) or Integrated Service Digital Network-Basic Access (ISDN-BA)- terminals. The ONU 304 is connected to the remaining network.

The methods and arrangements in accordance with the present invention will hereinafter be described in a system where QAM is used as modulation technique. However, for a man skilled in the art it will be apparent that the present invention may be implemented with other multi-level modulation techniques such as Pulse Amplitude Modulation (PAM).

Figure 4a illustrates a transmitter 400 and a receiver 404 in accordance with a first preferred embodiment of the present invention. The transmitter 400 is adapted to transmit a modulated bit stream $m_0 \dots m_{M-1}$. The bit stream is modulated by a modulator (not shown in figure 4a) in accordance with a multi-level modulation technique such as 16-QAM. The bit stream comprises user data and dummy data. When the transmitter is in connection with the receiver, the bit stream is sent from the transmitter to the receiver. The dummy data is sent when there is no user data to transmit. The modulated bit stream is represented by a symbol alphabet M comprising the symbols $m_0 \dots m_{M-1}$, wherein the dummy data is represented by the symbol m_0 . The transmitter comprises a vector transmitter 403 that converts message symbols $m_0 \dots m_{M-1}$ as shown in **figure 2** into vectors of real numbers and a modulator. In the first preferred embodiment of the present invention as shown in **figure 4a**, the bit stream is scrambled by randomly generated symbols from a predefined symbol alphabet Q before it is converted by the vector transmitter. A Pseudo-Random Binary Sequence (PRBS) generator 401 randomly generates symbols $q_0 \dots q_{k-1}$ from the alphabet Q stored in a lookup table 402, wherein $k < M$. The randomly generated symbols are then scrambled with the bit stream by a bitwise modulo-2 addition between each of the bits of the bit stream and a randomly generated symbol of Q . The scrambling of the bit stream, comprising user data and dummy data, results in that the power of the dummy data is substantially lower than the power of the user data. The bitwise modulo-2 addition is defined as

A	B	A+B
0	0	0
0	1	1
1	0	1
1	1	0

The receiver 404 is adapted to receive the scrambled modulated vector transmitted by the transmitter 400. The scrambled modulated vector is affected by the waveform of the used channel. The receiver 404 comprises a detector (not shown in figure 4a) that recreates a vector corresponding to the transmitted vector by correlating the received vector with a function equal to the expected vector. The receiver 404 further comprises a vector receiver 407. The vector receiver 407 reconverts the received vector into message symbols $q_0 \dots q_{k-1}$, i.e. it determines which of the message points $q_0 \dots q_{k-1}$ that is closest to the detected and recreated vector. Thus, a modulated bit stream $q_0 \dots q_{k-1}$ is recreated. It should, however, be noted that the vector receiver receives the entire M, and not only the subset Q.

In the first embodiment of the present invention, the signal determined by the vector receiver is scrambled by randomly generated symbols from the predefined symbol alphabet Q. A PRBS generator 405 synchronized with a PRBS generator 401 of the transmitter randomly generates symbols from the alphabet Q stored in the lookup table 406. The bit stream is then scrambled with the randomly generated symbol by a bitwise modulo-2 addition in order to recreate the estimated message symbols $\hat{m}_0 \dots \hat{m}_{N-1}$.

The scrambling of the bit stream with the power reduction subset Q differs from the scrambling used in the prior art in that Q is, in accordance with the present invention, selected so that the dummy data in the data stream gives a desired power reduction. I.e. the power of the scrambled dummy data is substantially less than the power of the scrambled user data.

In the following, the scrambling of the bit stream with the predefined symbols of Q is further described. In accordance with the present invention, Q is a subset of M . Q comprises symmetrically placed constellation points represented by q_i from the symbol alphabet Q . The generated pseudo-random sequence must also be known at the receiver so that the mappings can be decoded by a receiver as shown in **figures 4a** and **5a**. The average energy per modulation interval for dummy data is then

$$E_{dummy} = \frac{1}{|Q|} \sum_{i \in Q} E_i \quad (2)$$

where Q denotes the number of elements in Q , giving a maximum power reduction ratio of

$$r = \frac{E_{average}}{E_{dummy}} \quad (3)$$

As an example, a 4-bit constellation as in the 16-QAM, i.e. $M=\{0,1,2,\dots,14,15\}$ of **figure 2**, with a power reduction subset of $Q = \{0, 5, 10, 15\}$ using equations 1, 2 and 3 gives a maximum power reduction ratio of $r = 5$.

It should be noted that the illustration of the receiver and transmitter respectively is valid if $m_0=0$. In the general case, the look-up table comprises m_0+Q which results in that $m_0 + q_i$ is generated from the look-up table by means of the PRBS generator as shown in **figure 4b**.

An advantage with the method of the first preferred embodiment is that it is very simple to implement.

A transmitter 500 and a receiver 504 in accordance with a second embodiment of the present invention is illustrated in **figure 5a**. It should be noted that the function of the vector transmitter 503 and vector receiver 507 respectively is similar to the function of the vector transmitter 403 and vector receiver 407 respectively of the first embodiment shown in **figure 4a**.

In the second embodiment of the present invention, a mapping is performed by performing a modulo-2 addition between the modulated bit stream and a constant value q_0 from a second power reduction subset Q . The mapped bit stream are then transmitted to the vector transmitter 503.

5 The output vector from the vector transmitter is then multiplied with one transformation matrixes R_j of a set of transformation matrixes R_j stored in a lookup table 506 shown in **figure 5a**. The transformation matrix R_j is randomly generated by a PRBS generator 505. In accordance with the present invention, each transformation matrix of **figure 5a** transforms Q 90

10 degrees. The direction of the 90 degree transformation is hence randomly determined by the PRBS generator. If the modulation method is QAM ($N = 2$) and the vectors are represented by complex numbers, the set of transformation matrices degenerates to $\{1, i, -1, -i\}$. I.e. the result of the matrix multiplication, that is complex multiplication when the dimension is

15 2. In the QAM case, Q comprises 4 elements, m_0 , m_0 turned 90 degrees, m_0 turned 180 degrees and m_0 turned 270 degrees.

It should be noted that the illustration of the receiver 504 and transmitter 500 respectively is valid if $m_0=0$. In the general case, the data symbols m_i

20 are scrambled with m_0+Q , which results in that $m_0 + q$, is generated from the look-up table by means of the PRBS generator as shown in **figure 5b**.

Thus, the main idea with the present invention is to scramble a bit stream, represented by symbols from the symbol alphabet M , comprising user data

25 and dummy data with randomly generated symbols from a predefined alphabet Q , in order to substantially reduce the transmit power when dummy data is sent in relation to the transmit power of the user data. Furthermore, Q is a subset of M .

Thus, Q is selected by performing the following steps:

- 30
- Select a suitable reduction ratio, which determines a value of a desired E_{dummy} , since E_{av} is known or possible to determine. See formula (3).

- Determine a Q which results in a value close to the desired E_{dummy} .

Q comprises a number of message points, preferably four message points (q_0, q_1, q_2, q_3), lying symmetrically around the origin of the coordinates (0,0). The message points, e.g. the four message points (q_0, q_1, q_2, q_3), representing signal vectors (s_0, s_1, s_2, s_3), wherein the length of all of the signal vectors is equal, i.e., $\|s_0\| = \|s_1\| = \|s_2\| = \|s_3\|$ and the angle increments from s_0 to s_1 , s_1 to s_2 , s_2 to s_3 and s_3 to s_0 are 90 degrees. Thus, for e.g. 8-QAM, 16-QAM and 32-QAM, Q comprises preferably the four innermost message points of M , when M is represented graphically as in figure 2.

10

The only practical choices of dummy data patterns that works for all sizes of symbol alphabets M is an all-zero or an all-one binary sequence, i.e. m_0 is consistently represented by zeros or ones. Here follows two examples of actual user data protocols with suggestions on how to randomize user data and how the dummy data should be mapped.

15

In ATM (Asynchronous Transfer Mode), user data (payload) should be randomized using the self-synchronizing scrambler polynomial $x^43 + 1$ as described in the ITU-T recommendation I.432.1 and the dummy data, i.e. the idle cells, should be filled with the value 0x00.

20

Octet based HDLC (High-Level Data Link Control) has an inter-frame fill pattern of 0x7e octets. The transmitter and the receiver should bitwise modulo-2-add the value 0x7e to the data stream so that the inter-frame fill becomes an uninterrupted sequence of binary zeros.

25

Figure 6a shows a flowchart of a method in digital communication system for transmitting a modulated bit stream comprising user data and dummy data, according to the present invention in a general mode. The method comprises the following steps:

30

601a. Generate symbols randomly from a predefined symbol alphabet Q .

602a. Scramble the bit stream by performing bitwise modulo-2 addition between the modulated bit stream and the randomly generated symbols from

Q. I.e. each bit of the bit stream is modulo-2 added with a randomly generated symbol from Q.

- 603a. Transmit said scrambled bit stream. The predefined symbol alphabet Q is a subset of M and defined so that the transmit power level of the dummy data is substantially lower than the transmit power level of the user data.

Figure 6b shows a flowchart of a method in a digital communication system for receiving a bit stream according to the present invention in a general mode. The bit stream is transmitted and scrambled in accordance with method illustrated in **figure 6a**. The method comprises the following steps:

601b. Generate in synchronisation with the transmitter of the received bit stream, symbols randomly from the symbol alphabet Q.

602b. Scramble the received bit stream in order to recreate estimated message symbols from symbol alphabet M by performing bitwise modulo-2 addition between the received bit stream and the randomly generated symbols from Q. I.e. each bit of the bit stream is modulo-2 added with a randomly generated symbol from Q

- The methods may be implemented by a computer program product directly loadable into the internal memory of a computer within a transmitter and / or receiver in a digital communication system, comprising the software code portions for performing the steps of said methods. The computer program product may be stored on a computer usable medium, comprising readable program for causing a computer, within a transmitter and / or receiver in a digital communication system, to control an execution of the steps of any of the said method.

From the above discussion it is evident that the solution according to the present invention can be accomplished by using other modulation techniques than QAM although the embodiments of the present invention are illustrated with QAM.

It should also be noted that if Automatic Gain Control (AGC) is used on the receiver side, a feedback from the vector receiver to the AGC is required to prevent the AGC to adjust the signal level when a signal with reduced power level enters the receiver.

5

In the drawings and specification, there have been disclosed typical preferred embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

4
5
6
7
8
9
10

CLAIMS

- 5 1. Method in a digital communication system for transmitting a modulated bit stream comprising user data and dummy data, wherein the modulated user data is represented by symbols from a symbol alphabet M , the modulated dummy data is represented by a symbol m_d , the method is **characterised by** the steps of:
- 10 (a)- generating (601a) symbols q_0, \dots, q_j randomly from a predefined symbol alphabet Q being a subset of the symbol alphabet M ,
(b)- scrambling (602a) the bit stream by performing bitwise modulo-2 addition between the modulated bit stream and the randomly generated symbols q_0, \dots, q_j from Q , and
15 (c)- transmitting (603a) said scrambled bit stream, wherein the predefined symbol alphabet Q is defined so that the transmit power level of the dummy data is substantially lower than the transmit power level of the user data.
- 20 2. Method in a digital communication system for receiving a bit stream **characterised in** that the bit stream is transmitted and scrambled in accordance with claim 1, the method comprises the steps of:
- (d)- generating (601b) symbols q_0, \dots, q_j randomly from the symbol alphabet Q in synchronisation with the transmitter of the received bit stream, and
25 (e)- scrambling (602b) the received bit stream in order to recreate estimated message symbols from symbol alphabet M by performing bitwise modulo-2 addition between the received bit stream and the randomly generated symbols q_0, \dots, q_j from Q .
- 30 3. Method according to any of claims 1 and 2, wherein the bit stream is modulated with Quadrature Amplitude Modulation (QAM).
4. Method according to claim 3, wherein the QAM is 16-QAM.

5. Method according to any of claims 1 or 4, wherein Q comprises four message points $\{q_0, q_1, q_2, q_3\}$ representing signal vectors $\{s_0, s_1, s_2, s_3\}$, wherein the length of all of the signal vectors is equal, i.e., $\|s_0\| = \|s_1\| = \|s_2\| = \|s_3\|$ and the angle increments from s_0 to s_1 , s_1 to s_2 , s_2 to s_3 and s_3 to s_0 are 90 degrees.
6. Method according to any of claims 5, wherein Q comprises the four innermost message points of the symbol alphabet M.
7. Method according to any of previous claims, wherein the randomly generated symbols from Q is generated by applying a pseudo-random binary sequence generator to a lookup table wherein the symbol alphabet Q and m_0 are stored.
8. Method according to any of previous claims, wherein the modulated dummy data m_0 is consistently represented by zeros or consistently represented by ones.
9. Method according to any of previous claims 1-8, wherein the method is applied on VDSL.
10. A computer program product directly loadable into the internal memory of a computer within a mobile station or a base station transceiver in a communication system, comprising the software code portions for performing the steps of any of claims 1-9.
11. A computer program product stored on a computer usable medium, comprising readable program for causing a computer, within a mobile station or a base station transceiver in a communication system, to control an execution of the steps of any of the claims 1-9.
12. Transmitter (400) in a digital communication system comprising means for transmitting a modulated bit stream comprising user data and dummy data, wherein the modulated user data is represented by

symbols from a symbol alphabet M, the modulated dummy data is represented by a symbol m_u , **characterised by** means (401, 402) for generating symbols q_0, \dots, q_j randomly from a predefined symbol alphabet Q being a subset of M, means for scrambling the bit stream by performing bitwise modulo-2 addition between the modulated bit stream and the randomly generated symbols q_0, \dots, q_j from Q, and means for transmitting said scrambled bit stream, wherein the predefined symbol alphabet Q is defined so that the transmit power level of the dummy data is substantially lower than the transmit power level of the user data.

13. Receiver (404) in a digital telecommunication system comprising means for receiving a bit stream **characterised in** that the bit stream is transmitted and scrambled by a transmitter in accordance with claim 10, the receiver further comprises means (405, 406) for in synchronisation with the transmitter (400) of the received bit stream generating symbols q_0, \dots, q_j randomly from the symbol alphabet Q, and means for scrambling the received bit stream by performing bitwise modulo-2 addition between the received bit stream and the randomly generated symbols q_0, \dots, q_j from Q in order to recreate estimated message symbols from symbol alphabet M.

14. Transmitter (400) according to claim 12 or receiver (404) according to claim 13, wherein the bit stream is modulated with Quadrature Amplitude Modulation (QAM).

15. Transmitter (400) or receiver (404) according to claim 14, wherein the QAM is 16-QAM.

16. Transmitter (400) or receiver (404) according to any of claims 12-15, wherein Q comprises four message points $\{q_0, q_1, q_2, q_3\}$ representing signal vectors $\{s_0, s_1, s_2, s_3\}$, wherein the length of all of the signal vectors is equal, i.e., $\|s_0\| = \|s_1\| = \|s_2\| = \|s_3\|$ and the angle increments from s_0 to s_1 , s_1 to s_2 , s_2 to s_3 and s_3 to s_0 are 90 degrees.

17. Transmitter (400) or receiver (404) according to claim 16, wherein Q comprises the four innermost message points of the symbol alphabet M.
18. Transmitter (400) or receiver (404) according to any of previous claims 12-17, wherein the randomly generated symbols from Q is generated by applying a pseudo-random binary sequence generator (401;405) to a lookup table (402;406) wherein the symbol alphabet Q and m_0 are stored.
19. Transmitter (400) or receiver (404) according to any of previous claims 12-18, wherein the modulated dummy data m_0 is consistently represented by zeros or consistently represented by ones.
20. Transmitter (400) or receiver (404) according to any of previous claims 12-19, wherein the transmitter (400) or receiver (404) is applied on VDSL.
21. Transceiver in a digital communication system characterised in that it comprises the transmitter of claims 11 and 13-18 and the receiver of claims 12-18.

4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100



ABSTRACT

5 The present invention relates to methods, computer program products, a transmitter, a receiver and a transceiver comprising said transmitter and said receiver in a digital communication system for reducing the transmit power level when there is no user data is to send, i.e. when dummy data is sent instead. That is achieved by defining a symbol alphabet Q and scrambling a bit stream comprising user data and dummy data with randomly generated symbols from the symbol alphabet Q.

10

Publ. Fig.: 4a

4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2

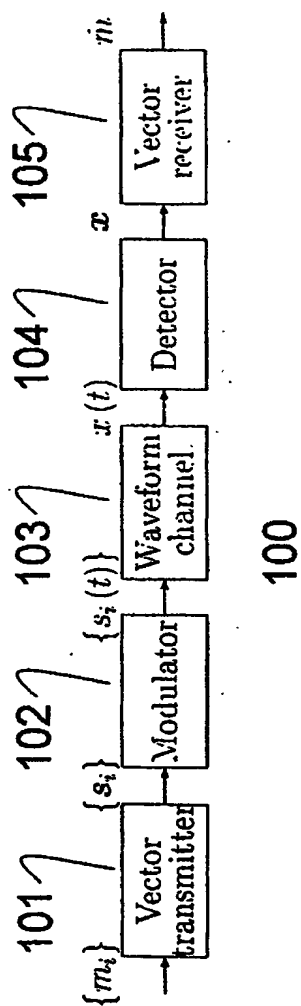

2/7

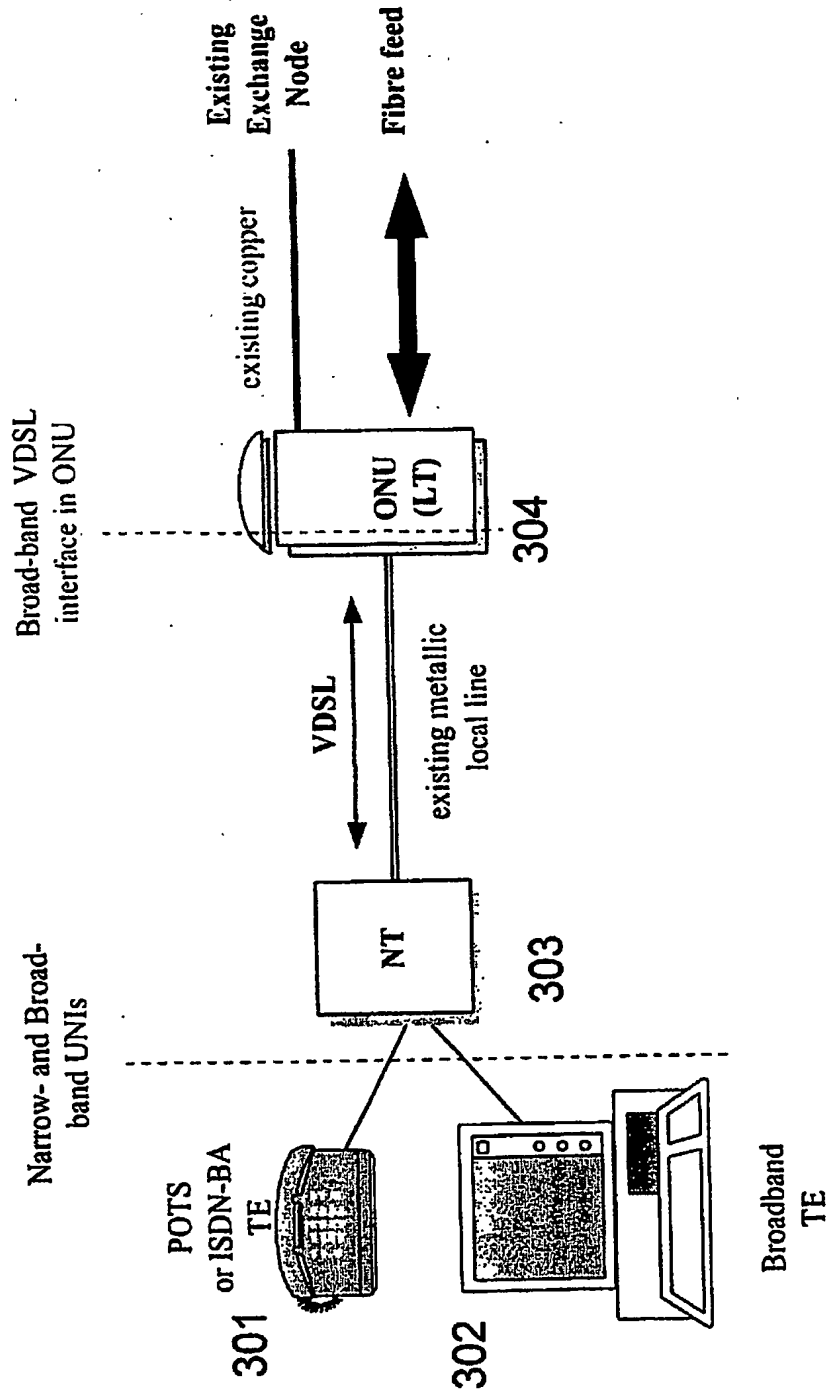


Fig.3

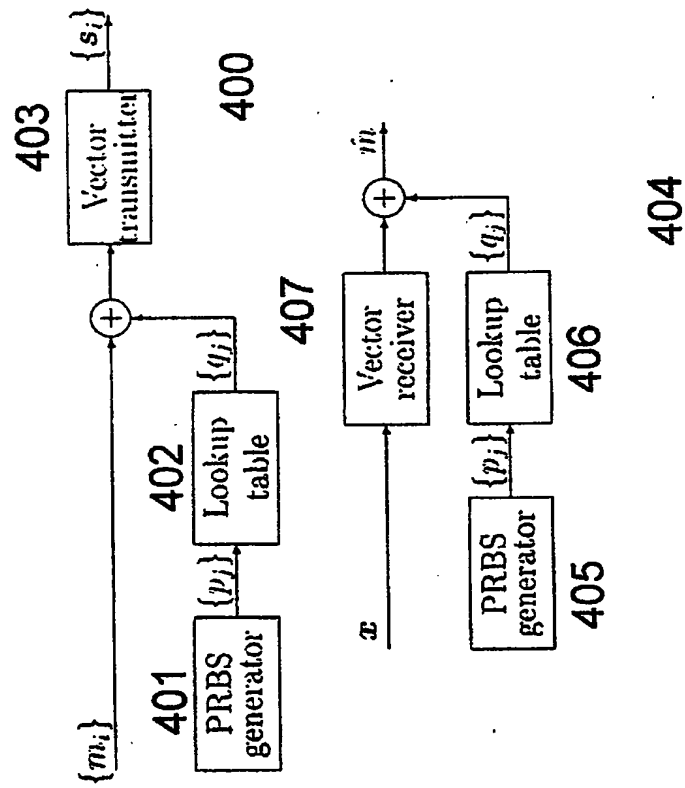


Fig. 4a

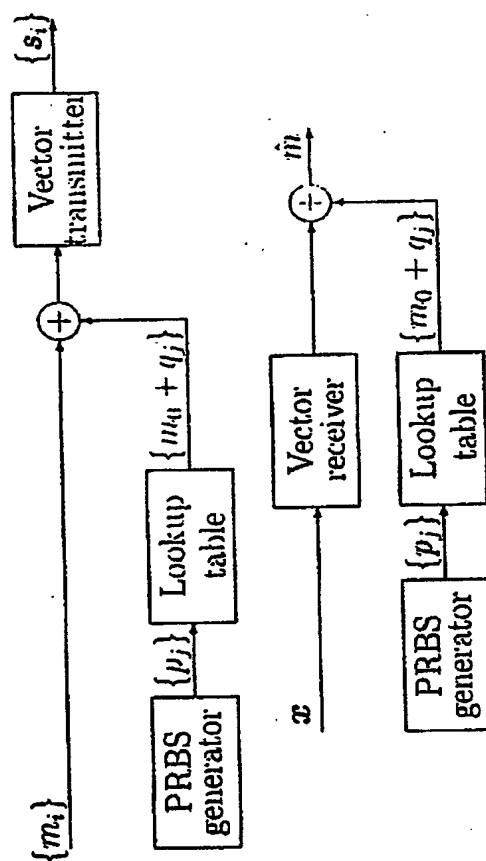


Fig. 4b

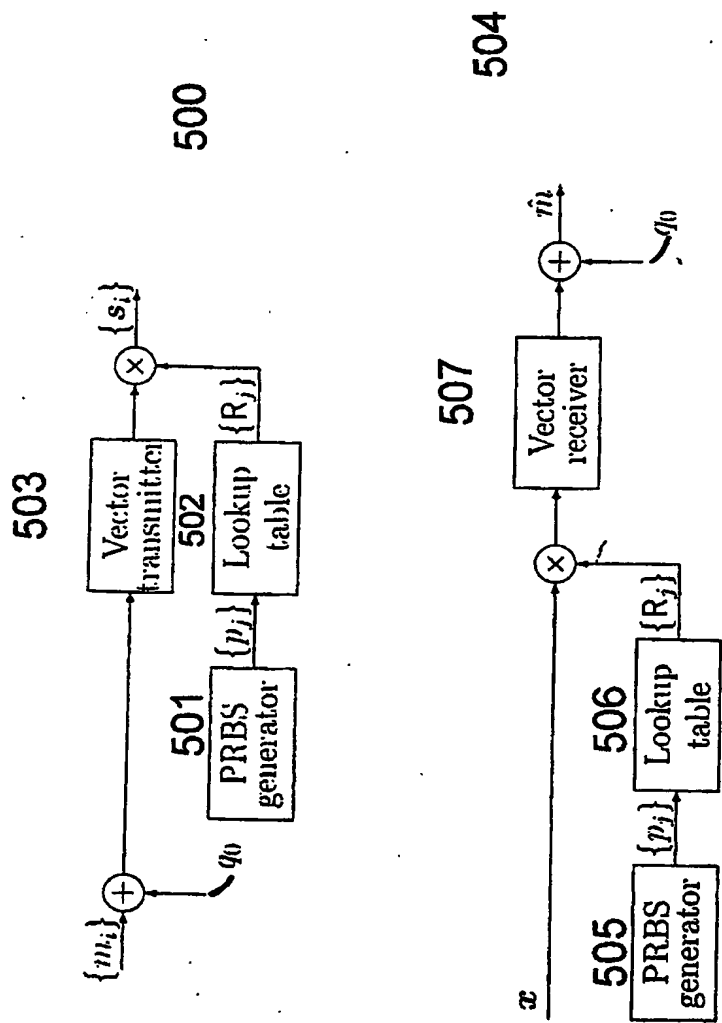


Fig. 5a

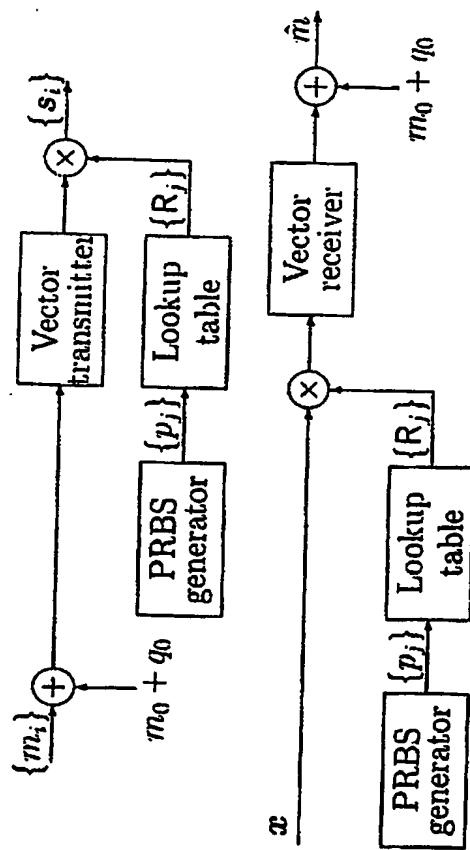


Fig. 5b

0300633-4

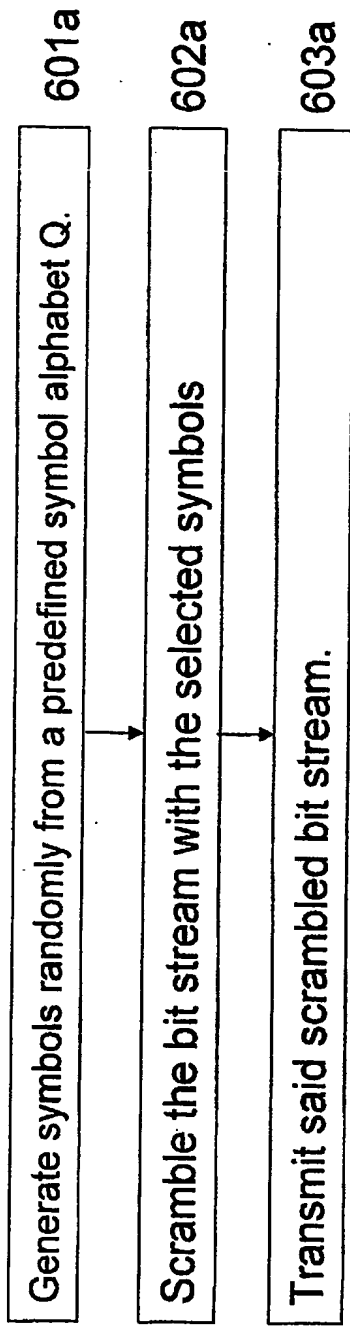


Fig. 6a

7/7

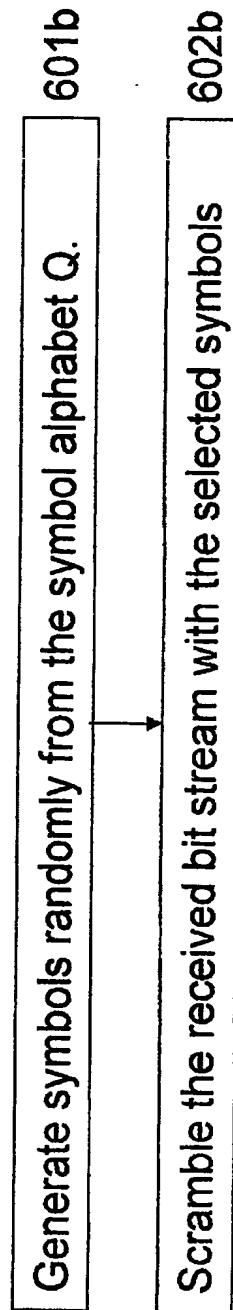


Fig. 6b

0300633-4